
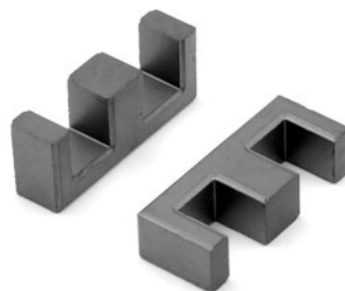


EE ferrite core

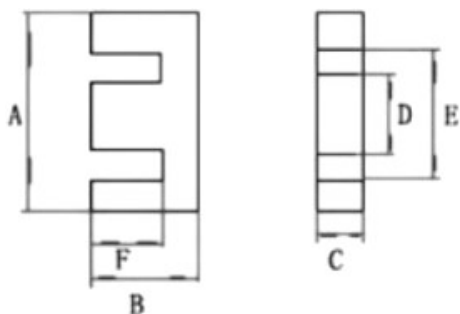

Type	Dimensions(mm)						Effective Parameter				AL± 25% n H/N ²	Material	Weight g/pair
	A	B	C	D	E	F	C1 mm ⁻¹	Le mm	Ae mm ²	Ve mm ³			
EE8.3/ 8/4	8.7 ±0.2	4.3 ±0.2	3.9 ±0.3	1.9 ±0.2	6.7 ±0.2	3.2 ±0.2	2.52	19.6 1	7.79	152.8	600	P40	0.80
EE10/ 10/5	11.1 ±0.2	5.9 ±0.2	4.8 ±0.2	2.6 ±0.2	8.6 ±0.2	4.3 ±0.2	2.34	26.5 9	11.3 8	302.6	850	P40	1.65
EE11/ 12/5	11.6 ±0.3	6.1 ±0.2	4.8 ±0.2	2.6 ±0.3	8.8 ±0.3	4.4 ±0.3	2.34	26.5 9	11.3 8	302.6	850	P40	1.85
EE12. 5/9/5	12.9 ±0.3	4.5 ±0.2	4.8 ±0.2	2.3 ±0.3	9.6 ±0.3	2.9 ±0.3	2.31	12.8	29.7	381	800	P40	1.65
EE12. 7/10/6	12.9 ±0.3	5.2 ±0.2	5.6 ±0.2	2.9 ±0.2	10.0 ±0.2	3.6 ±0.2	1.53	21.6 4	14.1 3	305.7	820	P40	2.25
EE13/ 12/6	13.1 ±0.3	6.3 ±0.3	5.8± 0.3	2.7 ±0.3	9.8 min	4.7 ±0.2	1.46	29.5	20.2	596	1100	P40	2.55
EE16/ 15/5	16.2 ±0.4	7.3 ±0.3	4.7 ±0.25	4.0 ±0.3	11.7 min	5.3 ±0.3	1.85	35.7	19.3	687	1200	P40	3.30
EE19/ 16/5	19.2 ±0.4	8.2 ±0.3	4.7 ±0.3	4.7 ±0.3	13.8 min	5.8 ±0.3	1.68	39.2	23.3	914	1100	P40	4.60
EE22/ 19/6	22.0 ±0.6	9.5 ±0.3	5.6 ±0.3	5.7 ±0.3	15.2 min	5.5 ±0.2	1.15	42.3	36.9	1558	1900	P40	8.00
EE25/ 20/6	25.2 ±0.2	10.0 ±0.2	6.3 ±0.2	6.1 ±0.3	18.7 ±0.2	6.9 ±0.2	1.21	49.5 4	41.0 3	2032. 7	1800	P40	9.60
EE28/ 21/11	28.4 ±0.5	10.3 ±0.2	10.7 ±0.3	7.2 ±0.3	20.0 min	6.3 ±0.2	0.63	52.0	82.5	4289	3500	P40	20.0
EE30/ 30/7	30.0 ±0.5	15.0 ±0.3	7.0 ±0.3	7.0 ±0.3	19.6 min	9.9 ±0.3	1.34	65.7 8	48.7 7	3208	2100	P40	21.0
EE33/ 28/13	34.8 ±0.5	14.2 ±0.2	12.6 ±0.3	10.0 ±0.3	25.0 min	9.7 ±0.3	0.60	68.1	113. 5	7737. 2	3600	P40	39.0
EE40/ 35/12	40.0 ±0.7	17.5 ±0.4	11.7 ±0.4	11.5 ±0.4	27.2 min	10.6 ±0.4	0.57	79.2 7	139. 06	11023	4300	P40	59.0
EE42/ 42/15	42.0 +1.0 /-0.7	21.2 ±0.4	15.0 +0.2/ -0.4	12.3+ 0.2/- 0.4	29.5 min	15.5 +0.3 /-0.1	0.6	97.8	180	17600	4200	P40	88.0
EE42/ 42/20	42.0 +1.0 /-0.7	21.2 ±0.4	20.0 +0.2/ -0.4	12.0+ 0.2/- 0.4	29.5 min	15.4 ±0.3	0.44	98.1 9	224. 91	22084	4500	P40	115.0