



EI ferrite core

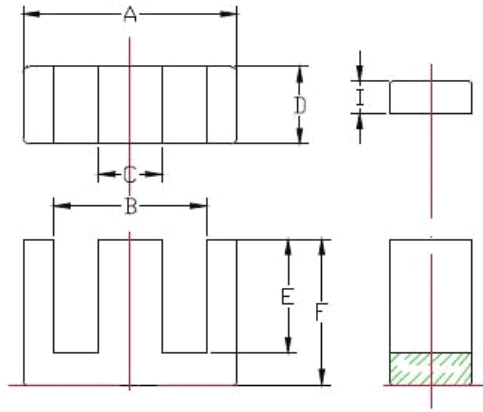

Type	Dimensions(mm)							Effective Parameter				AL ±25% n H/N ²	Weight
	A	B	C	D	E	F	I	C1 mm ⁻¹	Le mm	Ae mm ²	Ve mm ³	P40	g/pair
EI28	28.0 ±0.5	18.6 min	7.2 ±0.3	10.7 ±0.3	13.0± 0.3	16.9 ±0.3	4.0 ±0.2	0.585	48.9	83.6	4090	3800	21.0
EI33	33.0 ±0.6	23.5 min	9.7 ±0.3	12.7 ±0.3	19.3± 0.3	23.8 ±0.3	5.0± 0.2	0.563	67.3	119.4	8040	3700	40.0
EI40	40.0 ±0.7	27.2 min	11.6 ±0.4	11.6 ±0.4	21.25 ±0.3	27.0 +0.7/- 0.3	6.7 ±0.3	0.57	77.54	135.7 1	1052 2.7	4300	61.0
EI40B	40.0 ±0.7	27.2 min	11.6 ±0.4	11.6 ±0.4	21.25 ±0.3	27.0 +0.7/- 0.3	6.7 ±0.3	0.57	77.54	135.7 1	1052 2.7	5000	61.0