

Encapsulated Transformers


Type: EI38/14

3.5VA/4VA

- CE approved
- Potted under vacuum
- Dielectric strength—4000Vrms
- High ambient operation temperature(+ 70°C max)
- Insulation class—Class B(130°C)




Dimension (mm)

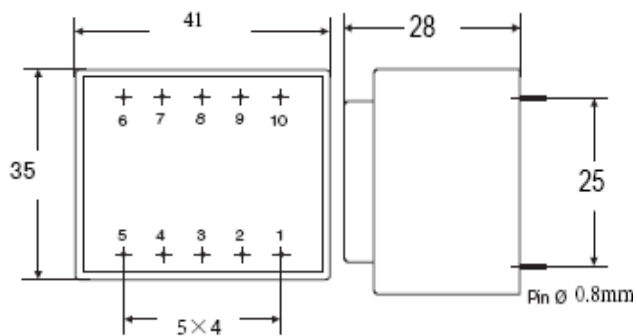

Empty pin shall be omitted if necessary

Circuit Diagram

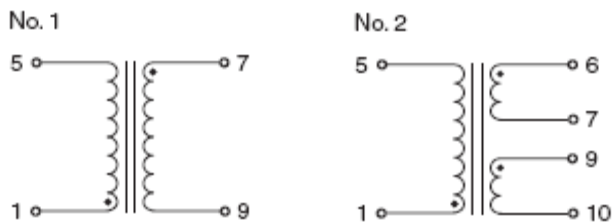

| Primary (230V) | Primary (115V) | Secondary (V/mA) | Power (VA) | Circuit Diagram |
|----------------|----------------|------------------|------------|-----------------|
| EI3814001 | EI3814101 | 6/583 | 3.5 | 1 |
| EI3814002 | EI3814102 | 6/666 | 4 | 1 |
| EI3814003 | EI3814103 | 9/389 | 3.5 | 1 |
| EI3814004 | EI3814104 | 9/444 | 4.0 | 1 |
| EI3814005 | EI3814105 | 12/292 | 3.5 | 1 |
| EI3814006 | EI3814106 | 12/333 | 4 | 1 |
| EI3814007 | EI3814107 | 15/233 | 3.5 | 1 |
| EI3814008 | EI3814108 | 15/266 | 4 | 1 |
| EI3814009 | EI3814109 | 18/194 | 3.5 | 1 |
| EI3814010 | EI3814110 | 18/222 | 4 | 1 |
| EI3814011 | EI3814111 | 24/146 | 3.5 | 1 |
| EI3814012 | EI3814112 | 24/166 | 4 | 1 |
| EI3814013 | EI3814113 | 2×6/292 | 3.5 | 2 |
| EI3814014 | EI3814114 | 2×6/333 | 4 | 2 |
| EI3814015 | EI3814115 | 2×9/194 | 3.5 | 2 |
| EI3814016 | EI3814116 | 2×9/222 | 4 | 2 |
| EI3814017 | EI3814117 | 2×12/146 | 3.5 | 2 |
| EI3814018 | EI3814118 | 2×12/166 | 4 | 2 |
| EI3814019 | EI3814119 | 2×15/117 | 3.5 | 2 |
| EI3814020 | EI3814120 | 2×15/133 | 4 | 2 |
| EI3814021 | EI3814121 | 2×18/97 | 3.5 | 2 |
| EI3814022 | EI3814122 | 2×18/111 | 4 | 2 |
| EI3814023 | EI3814123 | 2×24/73 | 3.5 | 2 |
| EI3814024 | EI3814124 | 2×24/83 | 4 | 2 |

Provide customized transformer