

RHH R4H R6H 型磁芯 Balun (Multi-Aperture Type)


用途：①整合变压器

②各种变压器


APPLICATIONS:①BALUN TRANSFORMERS

②VARIOUS RF TRANSFORMERS

ORDERING CODE:

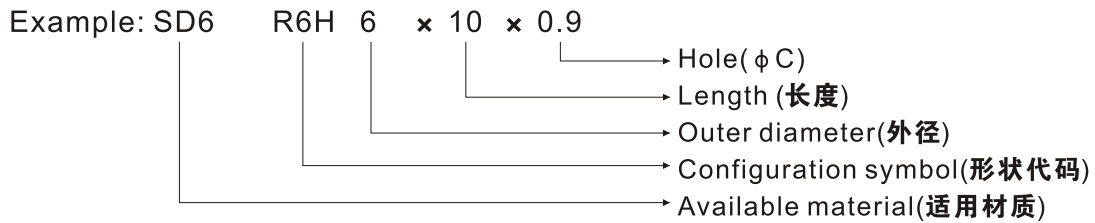

CONFIGURATIONS:

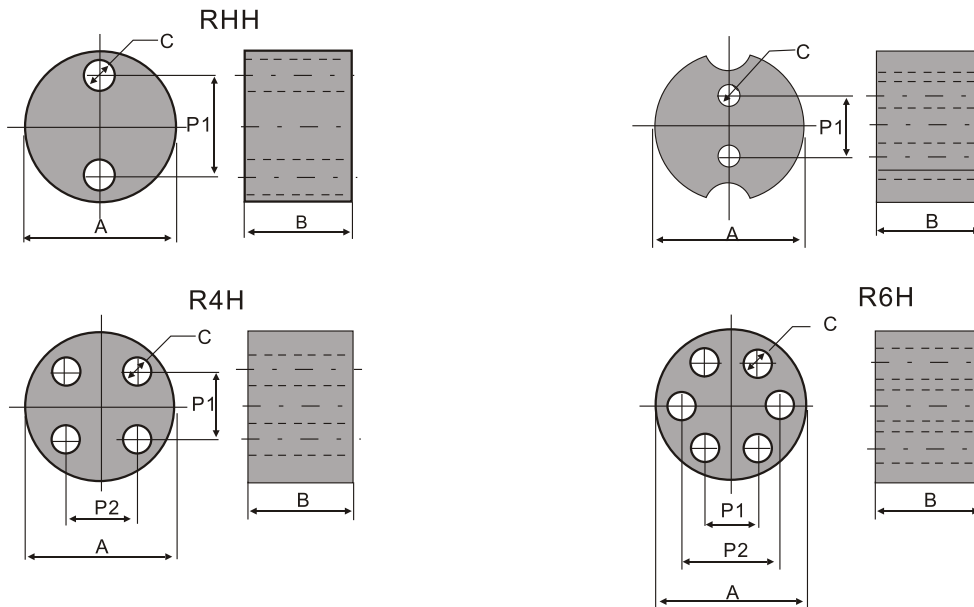

DIMENSION OF MAIN PRODUCTIONS:

UNIT:mm

Ordering code	A	B	C	P ₁	P ₂
RHH 6 × 12 × 1.0	6.0 ± 0.3	12.0 ± 0.5	1.0 ± 0.15	2.9 ± 0.15	
RHH 6.5 × 5.5 × 1.2R	6.5 ± 0.3	5.5 ± 0.03	1.2 ± 0.15	3.0 ± 0.15	
RHH 7 × 5.5 × 1.5R	7.0 ± 0.4	5.5 ± 0.3	1.5 ± 0.15	3.0 ± 0.15	
RHH 7 × 6 × 1.5	7.0 ± 0.4	6.0 ± 0.03	1.5 ± 0.15	2.7 ± 0.15	
R4H 6.7 × 7 × 1.3	6.7 ± 0.4	7.0 ± 0.3	1.3 ± 0.15	3.6 ± 0.15	3.6 ± 0.15
R4H 8 × 5 × 1.2	8.0 ± 0.4	5.0 ± 0.3	1.2 ± 0.15	3.0 ± 0.15	3.0 ± 0.15
R6H 6 × 10 × 0.9	6.0 ± 0.3	10.0 ± 0.5	0.9 ± 0.15	2.35 ± 0.15	3.25 ± 0.15

“B”对在合理范围内可调。